


????????????? ?????? ???. 5?, 6?: ?????????????? ????? ????? U/UTP ???. 5?, LSZH

????????????????? ????? ????? U/UTP ???. 5?, LSZH

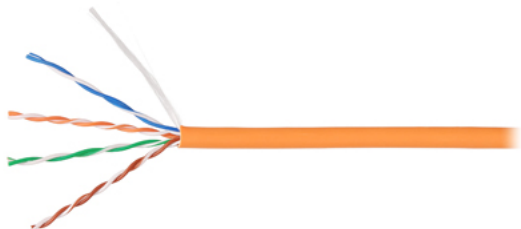

?????????????:

- ????????? ?? ?????????????? ?'????????, ?????????????? ?????????
- IEEE 802.3: 10Base-T, 100Base-T, 1000Base-T
- IEEE 802.5: Voice, ISDN, ATM 155, TPDDI

????????:	IN11-0005
??, ???:	?
?????:	+
?????????:	305 ?

?????????:

- ISO/IEC 11801 ed.2
- TIA 568-B.2
- IEC 61156-5EN
- EN 50288-3-1

????????? ?????????????????

??????????	?????????????
	?????? ????; Ø
	0,51 ?? (AWG 24)
????????? ???	????????????; Ø
	0,20 ??
?????????? ???	4
????????? ??????LSZH	
????????? ?????? 5,1 ?? (± 1.0 ??)	
?????????????	32 ??/??
?????:	
????? ??? -20° ? ??? ???????????	
	(????? ?????????)
	4 ?????)
????????????????? -20 - +60 °C	

?????????
?????????????
?????????????? 0 - +50 °C
?????????
???????????

?????????? ????????????????

???? ?? ? 93,8 ??/?
?????????
?????????
?????????? ??????%
????????????? (??) 100 ± 15
?????????
(1-100 ???)
????????? ??????(?/?/100?) ? 45
?????????
?????????? ??????(PF/100?)
???????????? 330Max

F R A N A P A P D
r e t t E C S L S el
e t e X R N F E a
q u n T d E E L y
u r u d B X X F n
e n a B T T E s/
n l ti d d X 1
c o o B B T 0
y s n d 0
M s d B
H d B /1
z B /1 0
 0 0
 0

0. 1 1. 6 6 6 6 6 5
7 9. 8 7 5 4 6 3 7
7 4 5
2
1. 2 2 6 6 6 6 6 5
0 0. 5. 3. 2. 3. 0. 7
 0 3 0 3 8 8 0
4. 2 2 5 5 5 5 4 5
0 3. 6. 2 3. 1. 8. 5
 0 3 3 7 7 2
8. 2 5. 5 4 4 4 4 5
0 4. 8 1. 6. 8. 5. 2. 4
 5 8 0 8 7 7 6.
 7
1 2 5. 5 4 4 4 4 5
0. 5. 8 1. 6. 8. 5. 2. 4
0 0 8 0 8 7 7 5.
 4
1 2 8. 4 3 4 3 3 5
6. 5. 2 7. 9. 4. 9. 6. 4
0 0 3 0 3 7 7 3
2 2 9. 4 3 4 3 3 5
0. 5. 3 5. 7. 2. 7. 4. 4
0 0 8 0 8 7 7 3
2 2 1 4 3 4 3 3 5
5. 4. 0. 4. 4. 1. 5. 2. 4
0 3 4 3 0 3 8 8 1.

									2
3	2	1	4	3	3	3	3	3	5
1.	3.	1.	2.	1.	9.	3.	0.	4	
2	6	7	9	0	9	9	9	0.	
5									4
6	2	1	3	2	3	2	2	4	
2.	1.	7	8.	1.	5.	7.	4.	3	
5	5		4	0	4	8	8	8.	
									6
1	2	2	3	1	3	2	2	5	
0	0.	2	5.	3.	2.	3.	0.	3	
0.	1		3	0	3	8	8	7.	
0									6