


????????????? ?????? ???, 5?, 6?: ?????????? ???? ???? F/UTP ???, 6?, LSZH

????????????? ???? ???? F/UTP ???, 6?, LSZH

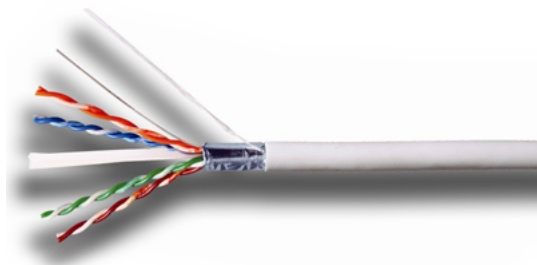

?????????????:

- ???????? ?? ?????????? ?'???????, ?????????????? ?????????;
- IEEE 802.3: 100Base-T4, 100Base-T?, 100VGAnyLAN, 1000Base-T, 1000Base-TX, 155Mbps ATM, 622Mbps ATM

?????????:	IN11-0007
??, ???:	?
?????:	+
?????????:	305 ?.

?????????:

- ISO/IEC 11801;
- TIA 568-B.2;
- IEC 61156-5EN 50173
- EN 50288-3-1

????????? ????????????????

??????????	?????????????
	?????? ???? , Ø
	0,585 ?? (AWG
	23)
?????????? ???	HDPE; Ø 1,15 ??
?????????? ???	4
?????????? ?????	LSZH, 1,0 ??
????????? ?????	7,2 ?? (± 0.3 ??)
????????????	64.6 ??/??
?????:	
????? ??? -20° ?	??? ???????????
	(????? ?????????
	4 ?????)
?????????? ???? ?	
????????????????	-20 - +70 °C
??????????	
??????????????	
????????????????	0 - +50 °C

?????????
???????????

?????????? ???????????????

???? ?? ? 93,8 ??/?
?????????
?????????
????????? ??????5%
???????????? (??) 100 ± 15
?????????
(1-100 ???)
???????????? (??) 100 ± 22
?????????
(100-250 ???)
????????? ??????(??/100?) ? 45
?????????
????????? ??????(PF/100?)
??????????? 330Max

F R A N P P E T D
r e t t E S S L C el
e t e X N E F L a
q u n T E L E d y
u r u d X F X B n
e n a B T E T s/
n l ti d X d 1
c o o B T B 0
y s n d 0
M s d B
H d B /1
z B /1 0
0 0
0

4 1 3. 6 6 5 5 4 5
8. 8 3. 3. 2. 5. 0 5
8 3 3 8 8 2
8 1 5. 5 5 4 4 4 5
9. 3 8. 8. 6. 9. 0 4
7 8 8 7 7 6.
7
1 2 5. 5 5 4 4 4 5
0 0 9 7. 7. 4. 7. 0 4
3 3 8 8 5.
4
1 2 7. 5 5 4 4 3 5
6 0 5 4. 4. 0. 3. 8 4
2 2 7 7 3
2 2 8. 5 5 3 4 3 5
0 0 4 2. 2. 8. 1. 7 4
8 8 8 8 2
2 1 9. 5 5 3 3 3 5
5 9. 4 1. 1. 6. 9. 6 4
3 3 3 8 8 1.
2
3 1 1 5 5 3 3 3 5
1. 8. 0. 0 0 4. 7. 5. 4
2 6 5 9 9 1 0.
5 4
6 1 1 4 4 2 3 3 5
2. 6. 5 5. 5. 8. 1. 2 3

5 5 4 4 9 9 8.
6
1 1 1 4 4 2 2 3 5
0 5. 9. 2. 2. 4. 7. 0 3
0 1 1 3 3 8 8 7.
6
1 1 2 4 4 2 2 2 5
2 4. 0 0. 0. 2. 5. 9 3
5 4 8 8 9 9 7.
2
2 1 2 3 3 1 2 2 5
0 3 2 7. 7. 8. 1. 7 3
0 8 8 8 8 6.
5
2 1 2 3 3 1 1 2 5
5 2. 2 6. 6. 6. 9. 6 3
0 3 3 3 8 8 6.
3
3 1 3 3 3 1 1 2 5
0 1. 4. 5. 5. 5. 8. 5. 3
0 8 3 1 1 3 3 2 6.
1